


Island Workbench

The island workbench maximizes efficient use of the laboratory's central area.


- The island workbench is the most versatile furniture solution in the VISULab range, as it can incorporate nearly all features of the collection.
- The central installation unit provides a fixed pathway for building systems and utilities.
- In the workbenches, there are no vertical legs at the front edge, which improves ergonomics, especially for seated work.
- Under-desk cabinets are attached to the table frame, leaving the floor space free and allowing the cabinet to be repositioned under the work surface. The cabinet can also be removed and relocated entirely under a different work surface.
- For standard solutions, we have selected high-quality, commonly used options in terms of dimensions and materials.
- Custom solutions are always tailored to meet the specific needs of the customer.





- Eeliksentie 6, 34870 Visuvesi, Finland
- @ visu@visu.fi
- **\(+358 44 749 4940**
- visu.fi



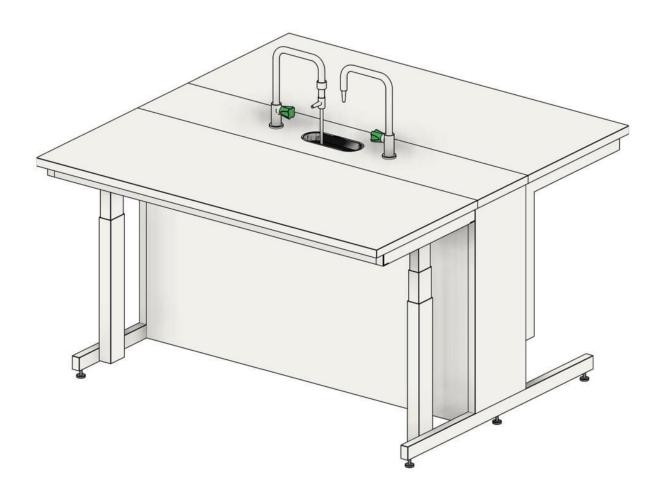

RK-S/M-T2 +sink

- eliksentie 6, 34870 Visuvesi, Finland
- @ visu@visu.fi
- **\(+358 44 749 4940**
- visu.fi





RK-YH-T2

- eliksentie 6, 34870 Visuvesi, Finland
- visu@visu.fi
- **\(\sigma +358 44 749 4940 \)**
- visu.fi





RK-S/S-Y-T2 Examples of Configurations

Standard

- Peliksentie 6, 34870 Visuvesi, Finland
- visu@visu.fi
- **\(+358 44 749 4940**
- visu.fi



Description	Product code	Standard dimensions [mm]			Worktop height adjustment	Additional information
		Width	Depth	Total height		
Island workbench	RK-T2	1200, 1500, 1800, 2000	1500*	900	manual	without upper cabinets
Island workbench	RK-S/M-T2	1200, 1500, 1800, 2000	1500*	900/1000	electric/manual**	without upper cabinets
Island workbench	RK-S/S-T2	1200, 1500, 1800, 2000	1500*	900/1000	sähkö	without upper cabinets
_						
Island workbench, with frame for upper cabinets	RK-RYK2-T2	1200, 1500, 1800, 2000	1500*	1400 +upper cabinet	manual	incl. the frame for upper cabinets (upper cabinets to be selected separately)
Island workbench, with frame for upper cabinets	RK-S/M-RYK2-T2	1200, 1500, 1800, 2000	1500*	1400 +upper cabinet	electric/manual**	incl. the frame for upper cabinets (upper cabinets to be selected separately)
Island workbench, with frame for upper cabinets	RK-S/S-RYK2-T2	1200, 1500, 1800, 2000	1500*	1400 +upper cabinet	electric	incl. the frame for upper cabinets (upper cabinets to be selected separately)
_						
Island workbench, with top shelf	RK-YH-T2	1200, 1500, 1800, 2000	1500*	1418	manual	incl. top shelf
Island workbench, with top shelf	RK-S/M-YH-T2	1200, 1500, 1800, 2000	1500*	1418	electric/manual**	incl. top shelf
Island workbench, with top shelf	RK-S/S-YH-T2	1200, 1500, 1800, 2000	1500*	1418	electric	incl. top shelf
_						
Island workbench, with upper cabinets	RK-Y-T2	1200, 1500, 1800, 2000	1500*	2100	manual	incl. pass-through upper cabinets with framed glass doors
Island workbench, with upper cabinets	RK-S/M-Y-T2	1200, 1500, 1800, 2000	1500*	2100	electric/manual**	incl. pass-through upper cabinets with framed glass doors
Island workbench, with upper cabinets	RK-S/S-Y-T2	1200, 1500, 1800, 2000	1500*	2100	electric	incl. pass-through upper cabinets with framed glass doors

^{*}worktop depth 600 + central installation unit depth 300, **one side electric height adjustment and one side manual height

- © Eeliksentie 6, 34870 Visuvesi, Finland
- @ visu@visu.fi
- **\(+358 44 749 4940**
- 💮 visu.fi



adjustment

Custom

In addition to standard models, we also manufacture workbenches according to customer specifications. In custom solutions, dimensions, materials, and features are entirely up to the customer.

Feel free to ask our experts for more information, and let's design the right solutions together!

Additional information

Installation mehod	Free-standing on the floor, adjustable pads as standard. Sink tables need to be mounted.			
Materials	Worktop material is acid- and chemical-resistant solid laminate (T2). Other options are also available; please read more on the Worktop Materials page. The frame is made of powder-coated steel to meet laboratory environmental requirements. An optional top shelf is standard in 18 mm P5 class chipboard with high-pressure laminate surface.			
Colour	Standard white, other colours by order.			
Load capacity	Manual height adjustment: Recommended load capacity is 200 kg per table, which typically provides sufficient rigidity considering sway and deflection of the surface. Maximum load capacity is 400 kg per table; this value should not be exceeded. Higher load capacities are also possible; please inquire with our experts for more information. Electric height adjustment: 240 kg per table (2 electric legs). Higher load capacities are also possible; please inquire with our experts for more information.			
Height adjustment	Manual adjustment: Stepless adjustment from 750 to 900 mm. Electric adjustment: Stepless adjustment from 750 to 1000 mm (programmable), with 3 memory locations, soft start and stop. The table comes standard with a collision detection sensor.			
By order	Upper cabinets, electrical systems, lighting, and taps with sinks are designed and installed as needed.			
LED light strip (optional)	Neutral white 4000 K, light output 1080 lm/m, power consumption 9.0 W/m, CRI >80, IP66			

- © Eeliksentie 6, 34870 Visuvesi, Finland
- @ visu@visu.fi
- **\(\sigma +358 44 749 4940 \)**
- visu.fi