



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

Wall workbench

- A wall workbench is best suited against a wall or along a corridor line.
- The installation unit at the back of the workbench provides a fixed pathway for building systems and utilities.
- There are no vertical legs at the front edge of the workbench, which improves ergonomics, especially for seated work.
- Under-desk cabinets are attached to the desk frame, leaving the floor space free, and allowing the cabinet to be repositioned under the work surface. The cabinet can be removed and relocated entirely under another work surface.
- We have selected high-quality, commonly used dimensions and materials for standard solutions.
- The custom solutions are always tailored to meet the specific needs of the client.



Feel free to contact us, and our experts will be happy to help you choose the right solutions.

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland


✉️ visu@visu.fi

☎️ +358 44 749 4940

🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

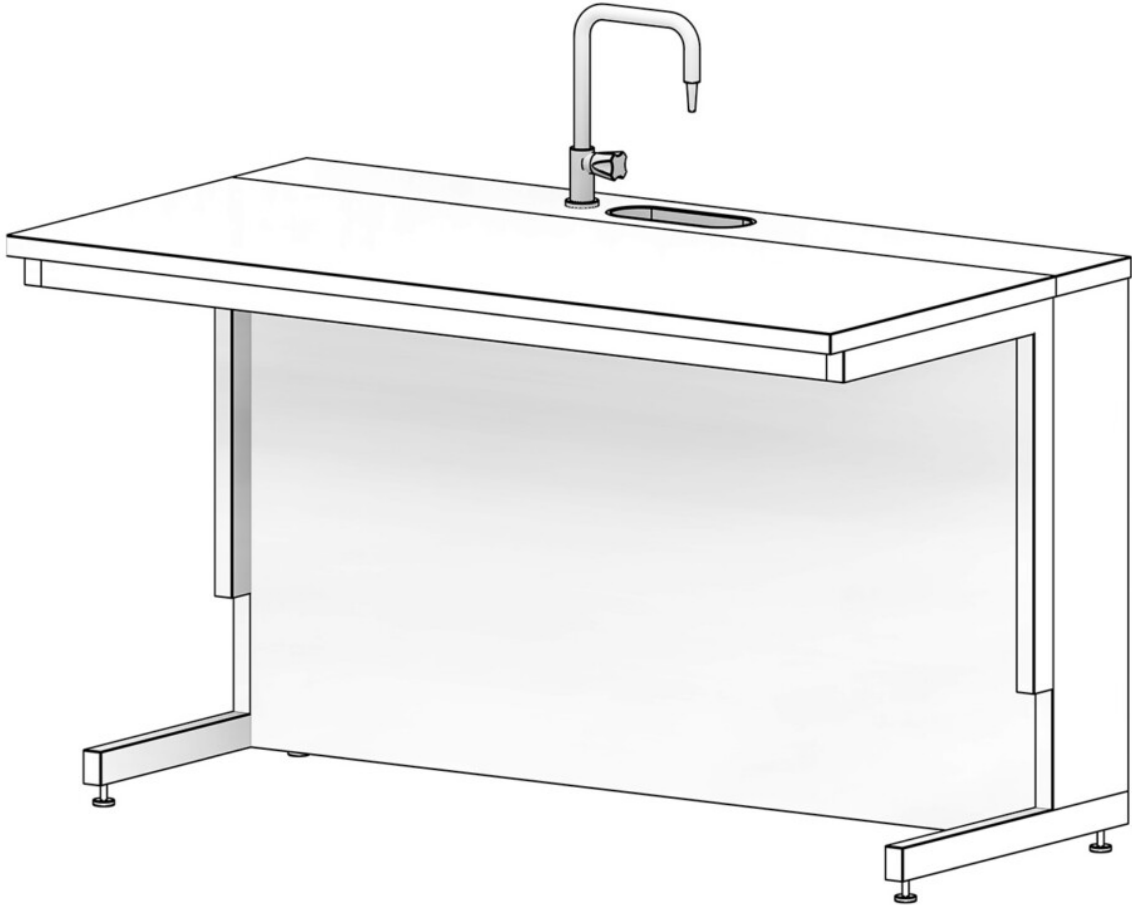

RS-T2 +sink

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland


✉️ visu@visu.fi

☎️ +358 44 749 4940

🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

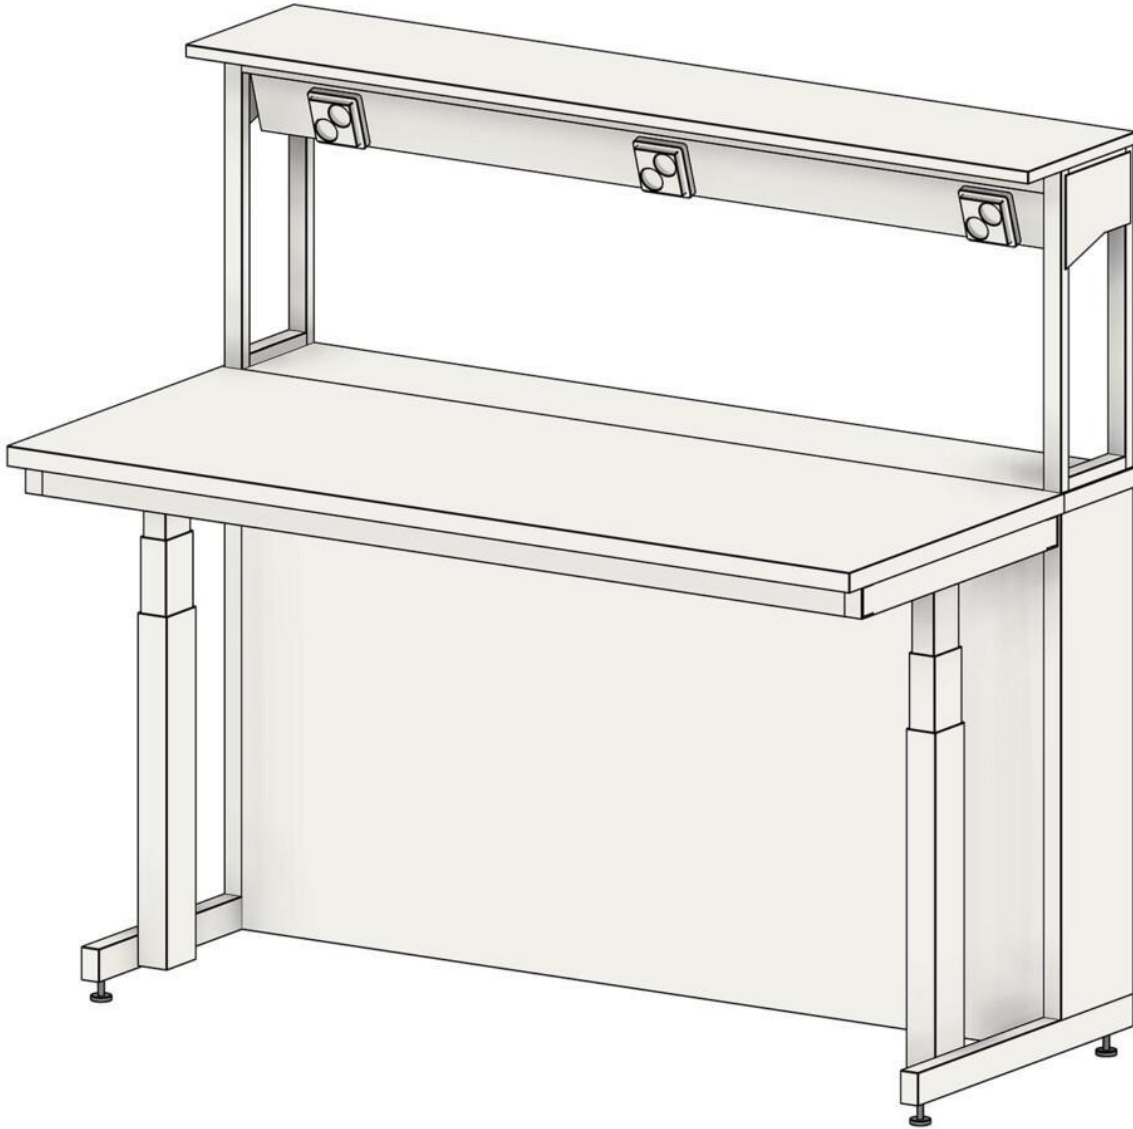


RS-S-YH-T2

VISU KALUSTE OY

- 📍 Eeliksentie 6, 34870 Visuvesi, Finland
- ✉️ visu@visu.fi
- ☎️ +358 44 749 4940
- 🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

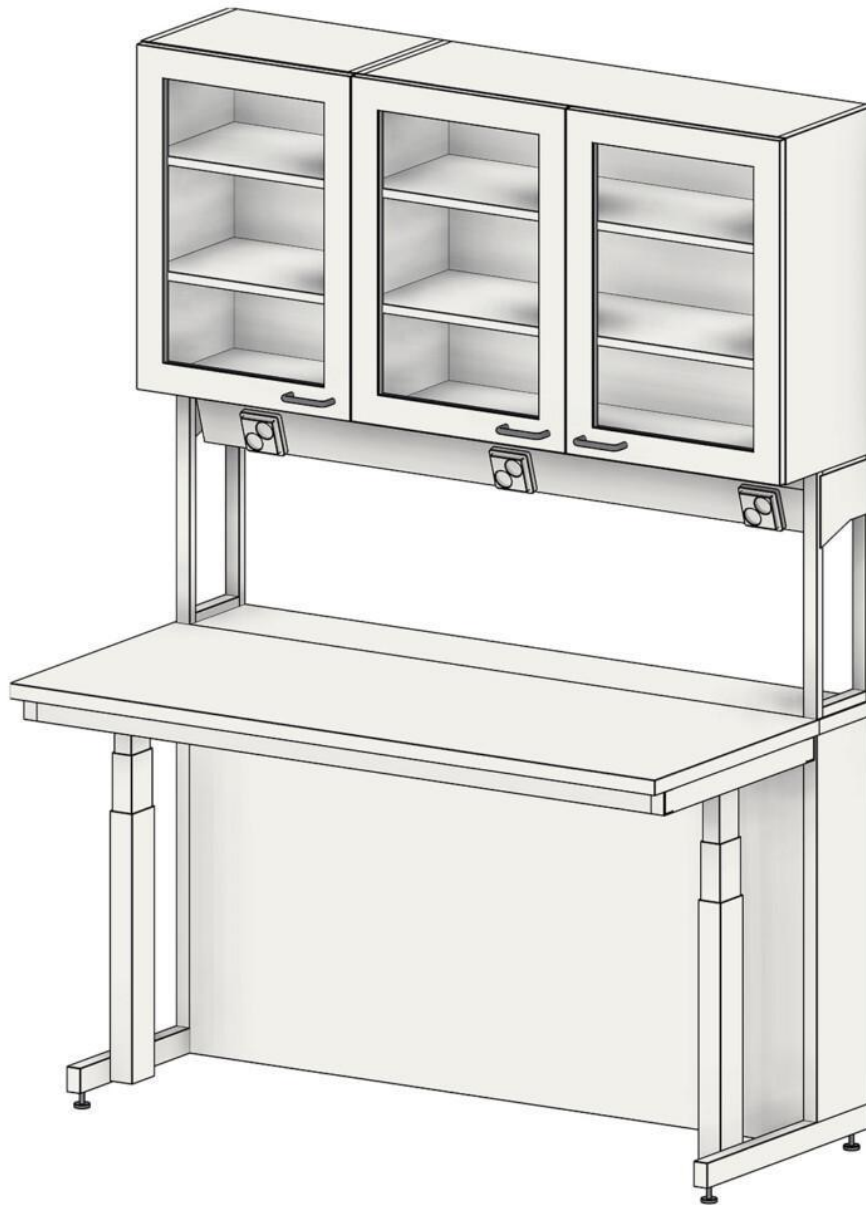

RS-S-Y-T2
Examples of configurations

Standard

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland

✉️ visu@visu.fi

☎️ +358 44 749 4940

🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

Description	Product code	Standard dimensions [mm]				Additional information
		Width	Depth	Height of the worktop	Total height	
Wall workbench	RS-T2	1,200 / 1,500 / 1,800 / 2,000	800*	manual adjustment 750 - 900	900	without upper cabinets
Wall workbench	RS-S-T2	1,200 / 1,500 / 1,800 / 2,000	800*	electric adjustment 750 - 1000	900 / 1,000	without upper cabinets
—						
Wall workbench, with frame for upper cabinets	RS-RYK1-T2	1,200 / 1,500 / 1,800 / 2,000	800*	manual adjustment 750 - 900	1,400 + upper cabinet	incl. the frame for upper cabinets (upper cabinets to be selected separately)
Wall workbench, with frame for upper cabinets	RS-S-RYK1-T2	1,200 / 1,500 / 1,800 / 2,000	800*	electric adjustment 750 - 1000	1,400 + upper cabinet	incl. the frame for upper cabinets (upper cabinets to be selected separately)
—						
Wall workbench, with top shelf	RS-YH-T2	1,200 / 1,500 / 1,800 / 2,000	800*	manual adjustment 750 - 900	1,418	incl. top shelf
Wall workbench, with top shelf	RS-S-YH-T2	1,200 / 1,500 / 1,800 / 2,000	800*	electric adjustment 750 - 1000	1,418	incl. top shelf
—						
Wall workbench, with upper cabinets	RS-Y-T2	1,200 / 1,500 / 1,800 / 2,000	800*	manual adjustment 750 - 900	2,100	incl. upper cabinets with framed glass doors
Wall workbench, with upper cabinets	RS-S-Y-T2	1,200 / 1,500 / 1,800 / 2,000	800*	electric adjustment 750 - 1,000	2,100	incl. upper cabinets with framed glass doors

*worktop depth 600 + installation unit depth 200

Custom

In addition to our standard models, we also manufacture workbenches according to client specifications. In the custom solutions, dimensions, materials, and features are entirely up to the client.

Feel free to ask our experts for more information, and let's design the right solutions together!

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland

✉️ visu@visu.fi

☎️ +358 44 749 4940

🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

Additional information

Installation method	Free-standing on the floor, adjustable pads as standard. Sink tables need to be mounted.
Materials	Worktop material is acid- and chemical-resistant solid laminate (T2). Other options also available; please read more on the Worktop Materials page. The frame is made of powder-coated steel to meet environmental requirements in laboratory. An optional standard top shelf 18 mm P5 class chipboard with high-pressure laminate surface
Colour	Standard white, other colours on request
Load capacity	Manual height adjustment: Recommended load capacity is 200 kg per table, which typically provides sufficient rigidity considering sway and deflection of the surface. Maximum load capacity 400 kg per table; this value should not be exceeded. Higher load capacities also possible; please inquire of our experts for more information. Electric height adjustment: 240 kg per table (2 electric legs). Higher load capacities are also possible; please inquire of our experts for more information.
Height adjustment	Manual adjustment: Stepless adjustment from 750 to 900 mm. Electric adjustment: Stepless adjustment from 750 to 1000 mm (programmable), with 3 memory presets, soft start and stop. Standard desk with an anti-collision sensor
On request	Upper cabinets, electrical systems, lighting, and taps with sinks are designed and installed on request.
LED light strip (optional)	Neutral white 4,000 K, light output 1,080 lm/m, power consumption 9.0 W/m, CRI >80, IP66

VISU KALUSTE OY

Eeliksentie 6, 34870 Visuvesi, Finland

visu@visu.fi

+358 44 749 4940

visu.fi