




INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

Module


- A module is a standalone piece of furniture unit that can be pre-fitted with electrical wiring and lighting. It can be delivered to the site fully ready for use.
- There is space behind the frame, allowing room for building services running along the wall.
- A worktop and upper cabinets are attached to a vertical rail. The VISU Deco mounting profile allows fully stepless height adjustment.
- A continuous work surface spanning the full depth of the unit provides an optimal user experience.
- There are no vertical legs at the front edge of the workbench, which improves ergonomics, especially for seated work.
- Under-desk cabinets are attached to the table frame, leaving the floor space free and allowing the cabinet to be repositioned under the work surface. The cabinet can also be removed and relocated entirely under another work surface.
- We have selected high-quality, commonly used dimensions and materials for our standard solutions.
- The custom solutions are always tailored to meet the specific needs of the client.



VISU KALUSTE OY

 Eeliksentie 6, 34870 Visuvesi, Finland


 visu@visu.fi

 +358 44 749 4940

 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

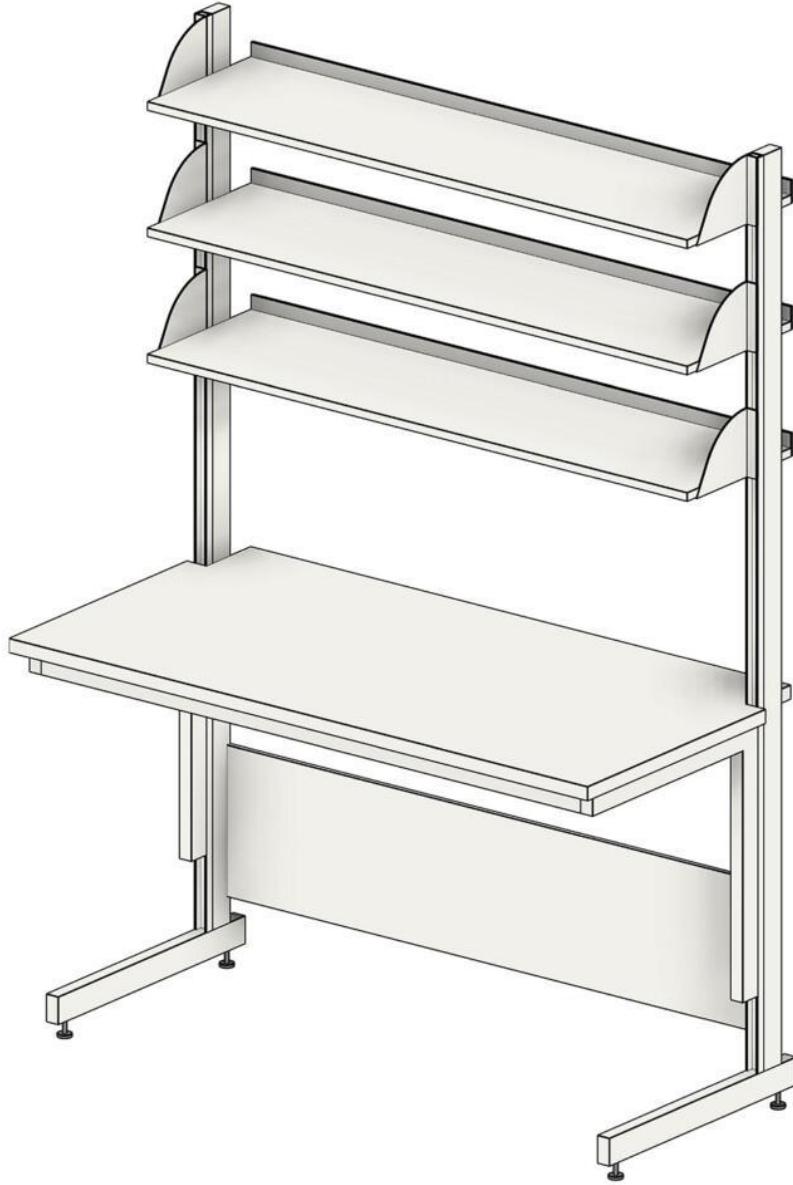

RM-YH-T2

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland


✉️ visu@visu.fi

☎️ +358 44 749 4940

🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

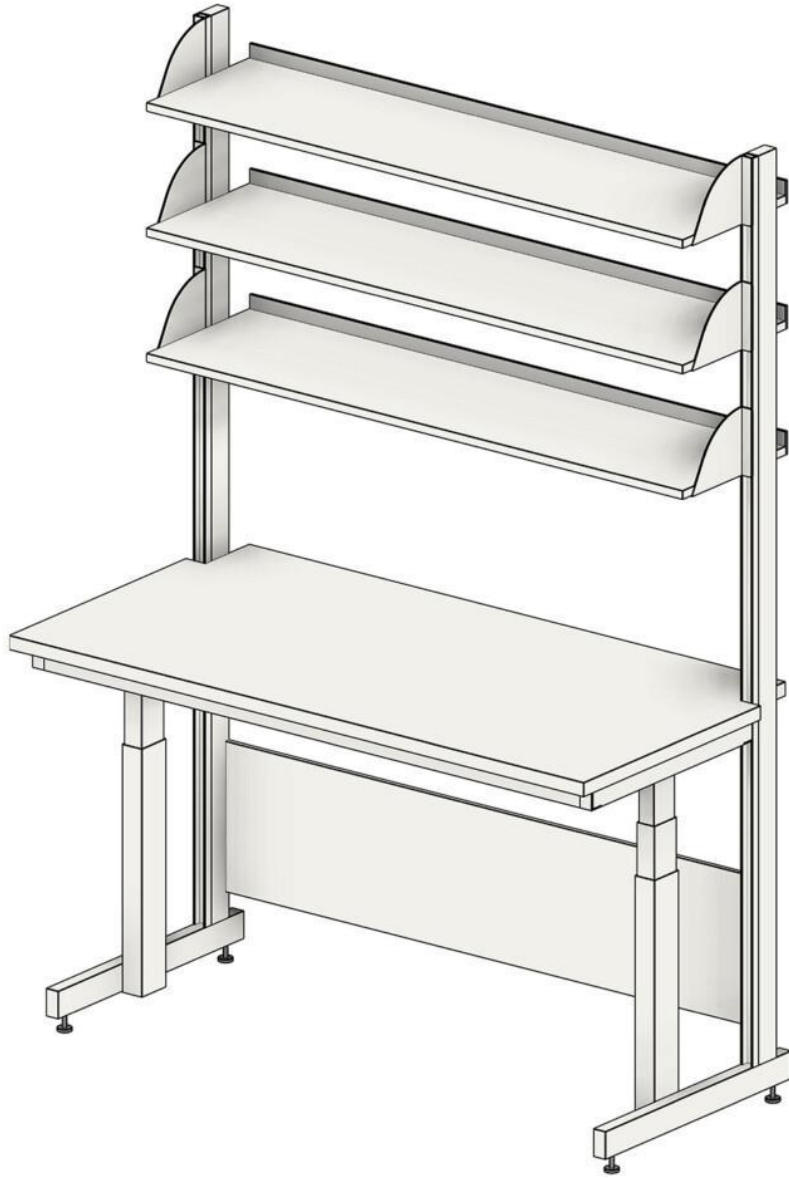

RM-S-YH-T2

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland


✉️ visu@visu.fi

☎️ +358 44 749 4940

🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

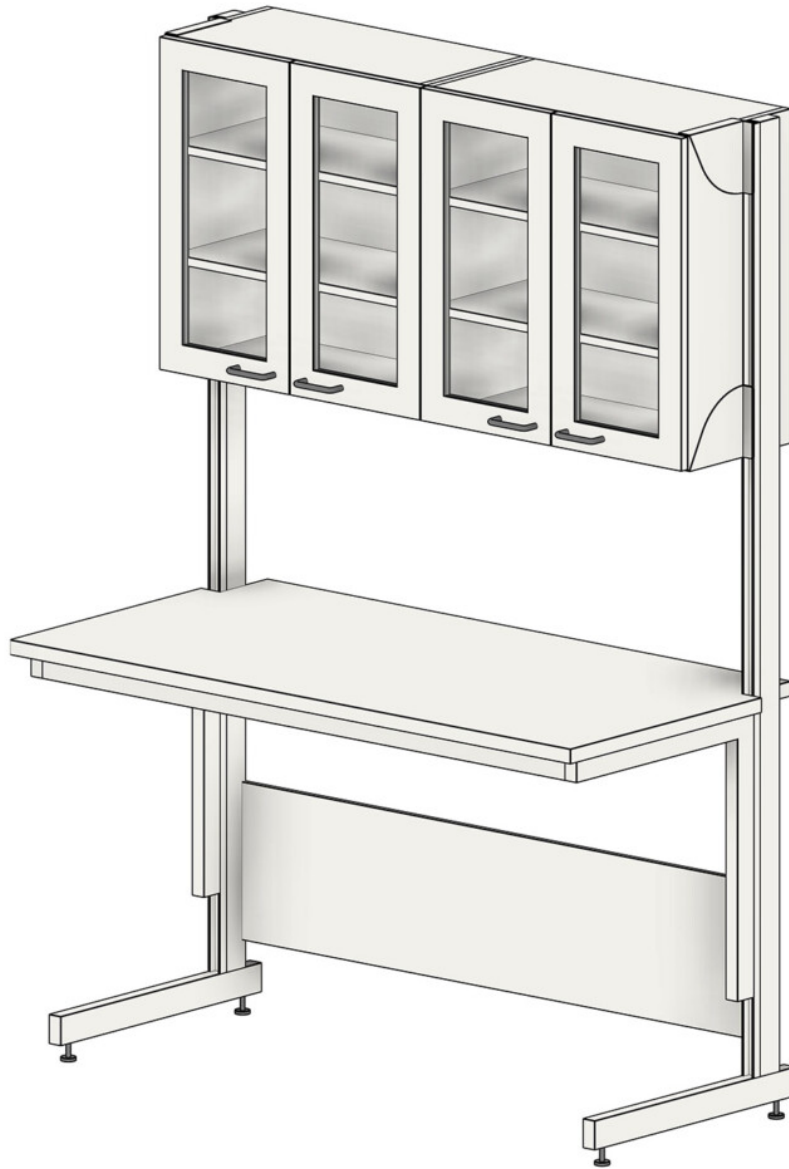

RM-Y-T2
Examples of configurations

Standard

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland

✉️ visu@visu.fi

☎️ +358 44 749 4940

🌐 visu.fi



INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

Description	Product code	Standard dimensions [mm]				Additional information
		Width	Depth	Worktop height	Total height	
Module	RM-T2	900 / 1,200 / 1,500 / 1,800	750	manually adj. 750 - 1,200	2,100	without upper cabinets (to be selected separately)
Module, electric height adj.	RM-S-T2	900 / 1,200 / 1,500 / 1,800	750	electrically adj. 750 - 1,200	2,100	without upper cabinets (to be selected separately)
Module with upper shelves	RM-YH-T2	900 / 1,200 / 1,500 / 1,800	750	manually adj. 750 - 1,200	2,100	incl. 3 pcs of height adj. upper shelves (with raised back edge)
Module, upper shelves, electric height adj.	RM-S-YH-T2	900 / 1,200 / 1,500 / 1,800	750	electrically adj. 750 - 1,200	2,100	incl. 3 pcs of height adj. upper shelves (with raised back edge)
Module with upper cabinets	RM-Y-T2	900 / 1,200 / 1,500 / 1,800	750	manually adj. 750 - 1,200	2,100	incl. upper cabinets with framed glass doors
Module, upper cabinets, electric height adj.	RM-S-Y-T2	900 / 1,200 / 1,500 / 1,800	750	electrically adj. 750 - 1,200	2,100	incl. upper cabinets with framed glass doors

Custom

In addition to the standard models, we also manufacture workbenches according to client specifications. In the custom solutions, dimensions, materials, and features are entirely up to the client.

Feel free to ask our experts for more information, and let's design the right solutions together!

Additional information

Installation method	Free-standing on the floor, adjustable pads as standard. Sink tables need to be mounted.
Materialit	Worktop material is acid- and chemical-resistant solid laminate (T2). Other options are also available; please read more on the Worktop Materials page. The frame is made of powder-coated steel to meet laboratory environmental requirements. Upper shelves are P5 class chipboard with high-pressure laminate surface.
Colour	Standard white, other colours on request.

VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland

✉️ visu@visu.fi

☎️ +358 44 749 4940


🌐 visu.fi




INNOSTAVIA YMPÄRISTÖJÄ
TIETEELLE JA TUTKIMUKSELLE

Load capacity	Manual height adjustment: Recommended load capacity 200 kg per table, which typically provides sufficient rigidity considering sway and deflection of the surface. Maximum load capacity 400 kg per table; this value should not be exceeded. Higher load capacities also possible; please inquire of our experts for more information. Electric height adjustment: 240 kg per table (2 electric legs). Higher load capacities are also possible; please inquire of our experts for more information.
Electric height adjustment	With 3 memory locations. Soft start and stop. The table comes standard with a collision detection sensor.
On request	Upper cabinets, electrical systems, lighting, and taps with sinks are designed and installed as requested.
LED light strip (optional)	Neutral white 4,000 K, light output 1,080 lm/m, power consumption 9.0 W/m, CRI >80, IP66

VISU KALUSTE OY

 Eeliksentie 6, 34870 Visuvesi, Finland

 visu@visu.fi

 +358 44 749 4940

 visu.fi