



HANGING UNDER-DESK CABINET

Installation

Updated 18.5.2022



VISU KALUSTE OY

📍 Eeliksentie 6, 34870 Visuvesi, Finland


@ visu@visu.fi

☎ +358 44 749 4940


🌐 visu.fi

INSTALLATION

The under-desk cabinet is mounted on the rails by first raising the furniture to the lower level of the rear edge brackets.

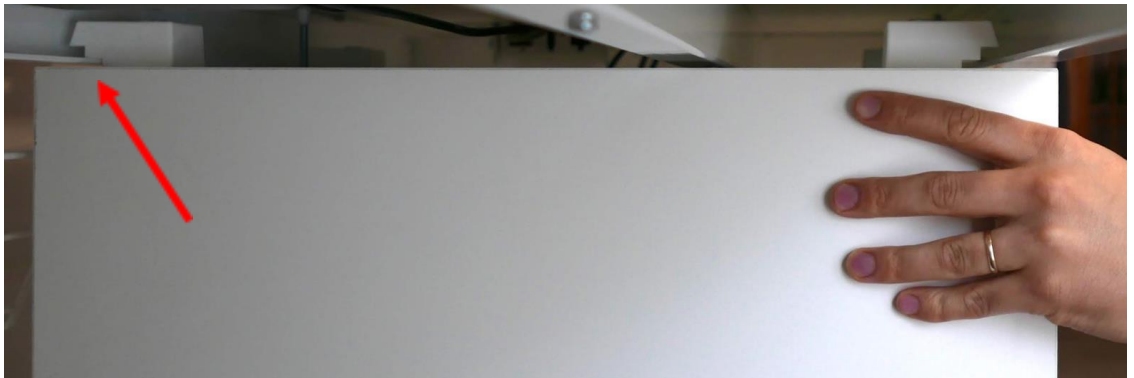

The cabinet is then lifted into place and slowly pulled forward until it descends to the upper level of the brackets at the front and rear.

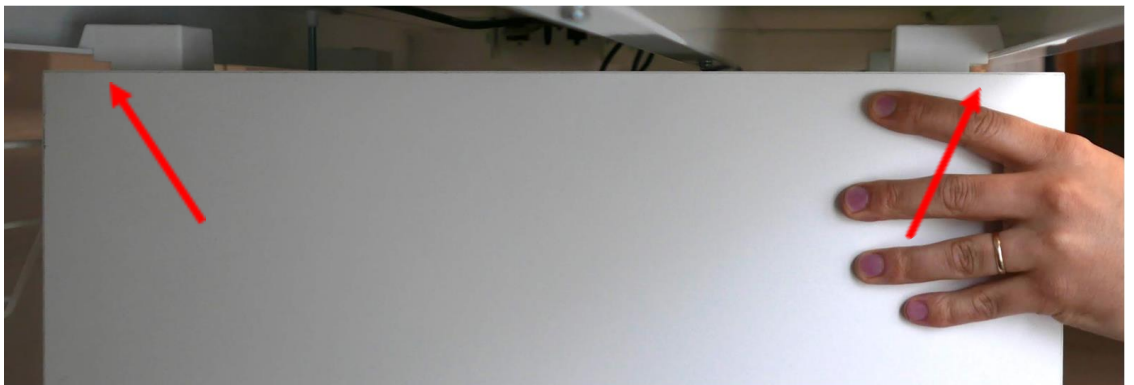

You can now slide the cabinet sideways to the desired position along the rails. Finally, lock the cabinet to the frame, see the instructions below.

LOCKING UNDER-DESK CABINET

The under-desk cabinet must be locked with the locking bolts (most common option) or with a separate locking wedge to prevent unintentional detachment.

Locking bolt

The under-desk cabinet has factory-fitted locking bolts located at the top plate front and rear edge or only at the rear edge.

Note. The locking bolt should be tightened to the end of the thread or until it slightly touches the underside of the worktop.



Locking wedge

The locking wedge is pressed into the hole in the front of the suspension bracket. If removing the furniture, pull the locking wedge out.

